

# Nuvo-9531 Series

Intel® 14<sup>th</sup>/13<sup>th</sup>/12<sup>th</sup>-Gen Core™ i9/ i7/ i5/ i3 Compact Fanless Computer with 4x 2.5GbE, 4x USB3.2 and 1x Hot-swappable HDD Tray



## Key Features

- 212 x 165 x 63 mm low-profile design
- Intel® 14<sup>th</sup>/13<sup>th</sup>/12<sup>th</sup>-Gen Core™ 35W/ 65W LGA1700 CPU
- Rugged, -25°C to 60°C fanless operation
- 4x 2.5GbE with optional PoE+ and 4x USB3.2 Gen 1 with screw-lock
- M.2 2280 Gen4x4 NVMe and 1x hot-swappable HDD tray for storage
- 4-CH isolated DI and 4-CH isolated DO
- VGA + DP dual display outputs
- Optional ignition power control

[CONTACT US](#)
[GET QUOTE](#)

## Introduction

Nuvo-9531 is one of the most compact fanless embedded computers based on the Intel® 14<sup>th</sup>/13<sup>th</sup>/12<sup>th</sup>-Gen platform. Measuring just 212 x 165 x 63 mm, it can fit into restricted spaces, such as in robotic arm and AMR applications. Despite its compact size, Nuvo-9531 does not compromise on performance. Built on the advanced Intel® 7 process, Intel® 14th-Gen processors have up to 24 cores/ 32 threads to deliver up to 2x the performance when compared to previous Intel® 10<sup>th</sup> or 11<sup>th</sup>-Gen platforms. Nuvo-9531 is a compact fanless embedded computer that offers the ultimate computing for various industrial applications.

Nuvo-9531 has rich I/O functions. It features four 2.5GbE with optional PoE+ PSE and four USB3.2 Gen1 ports for multiple camera connectivity for machine vision and surveillance applications. In addition, it features a Gen4 x4 M.2 NVMe slot for the latest NVMe SSD that supports read/ write speeds up to 7000 MB/s; a hot-swappable HDD tray to hot-swap the storage drive without turning off the system or dismantling the chassis; two mPCIe and one M.2 E key slots to install WiFi or 5G/ 4G wireless communication modules. The system is also equipped with 8x DIO, 2x COM ports, and dual display outputs for your industrial embedded application needs.

As a compact embedded computer, Nuvo-9531 delivers excellent computing performance and offers an abundance of I/O connections. It is suitable for a variety of industrial applications, especially when installation space is limited.

## Specifications

System Core		Internal Expansion Bus	
Processor	Supporting Intel® 14 <sup>th</sup> -Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP) - Intel® Core™ i9-14900/ i9-14900T - Intel® Core™ i7-14700/ i7-14700T - Intel® Core™ i5-14500/ i5-14400/ i5-14500T - Intel® Core™ i3-14100/ i3-14100T	<b>Mini PCI Express</b> 2x full-size mini PCI Express sockets with internal SIM sockets <b>M.2 E key</b> 1x M.2 2230 E key socket for WiFi5, WiFi6 or Google Edge TPU module	
	Supporting Intel® 13 <sup>th</sup> -Gen Core™ CPU <sup>[1]</sup> (LGA1700 socket, 65W/ 35W TDP) - Intel® Core™ i9-13900E/ i9-13900TE - Intel® Core™ i7-13700E/ i7-13700TE - Intel® Core™ i5-13500E/ i5-13400E/ i5-13500TE - Intel® Core™ i3-13100E/ i3-13100TE	Supporting Intel® 12 <sup>th</sup> -Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP) - Intel® Core™ i9-12900E/ i9-12900TE - Intel® Core™ i7-12700E/ i7-12700TE - Intel® Core™ i5-12500E/ i5-12500TE - Intel® Core™ i3-12100E/ i3-12100TE - Intel® Pentium® G7400E/ G7400TE - Intel® Celeron® G6900E/ G6900TE	<b>Storage Interface</b> <b>SATA HDD</b> 1x hot-swappable 2.5" HDD/ SSD tray for 7mm HDD/ SSD <b>M.2</b> 1x M.2 2280 M key socket (PCIe Gen4 x4) for NVMe SSD
Chipset	Intel® H610E platform controller hub	<b>Power Supply</b> <b>DC Input</b> 1x 3-pin pluggable terminal block for 8-48V DC input with optional ignition power control	
Graphics	Integrated Intel® UHD Graphics 770 (32EU) / 730 (24EU)	<b>Mechanical</b> <b>Dimension</b> 212mm (W) x 165 mm (D) x 63 mm (H) <b>Weight</b> 2.4 kg <b>Mounting</b> Wall-mount (standard) or DIN-rail mount (optional)	
Memory	Up to 32GB non-ECC DDR4 3200 SDRAM (one SODIMM slot)	<b>Environmental</b> <b>Operating Temperature</b> with 35W CPU -25°C ~ 60°C <sup>[2]</sup> with 65W CPU (installation of the optional fan kit is recommended) -25°C ~ 60°C <sup>[2]/[3]</sup>	
TPM	Supports dTPM 2.0	<b>Storage Temperature</b> -40°C ~ 85°C <b>Humidity</b> 10%~90%, non-condensing <b>Vibration</b> Operating, MIL-STD-810G, Method 514.8, Category 4 <b>Shock</b> Operating, MIL-STD-810G, Method 516.8, Procedure I, Table 516.6-II <b>EMC</b> CE/FCC Class A, according to EN 55032 & EN 55035	
I/O Interface			
Ethernet	4x 2.5GBASE-T Ethernet ports by Intel® I226-IT GbE controllers		
PoE+	Optional IEEE 802.3at PoE+ PSE for 4x 2.5GbE ports 100 W total power budget		
USB 3.2	4x USB 3.2 Gen1 (5 Gbps) ports		
USB 2.0	2x USB 2.0 ports		
Video Port (Integrated Graphics)	1x VGA output, supporting 1920 x 1200 resolution 1x DisplayPort, supporting 4096 x 2304 resolution		
Serial Port	1x software-programmable RS-232/422/485 ports (COM1) 3x 3-wire RS-232 ports (COM2/3/4) or 1x RS-422/485 port (COM2)		
Audio	1x 3.5 mm jack for mic-in and speaker-out		
Isolated DIO	4-CH isolated DI and 4-CH isolated DO		

<sup>[1]</sup>A BIOS update may be required for the system to recognize 13th-Gen processors. Please contact Neousys Technology for more information.


<sup>[2]</sup>For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.

<sup>[3]</sup>For 65W CPUs, the optional fan kit is recommended for operating at ambient temperatures higher than 50°C.

## Appearance



## Dimensions

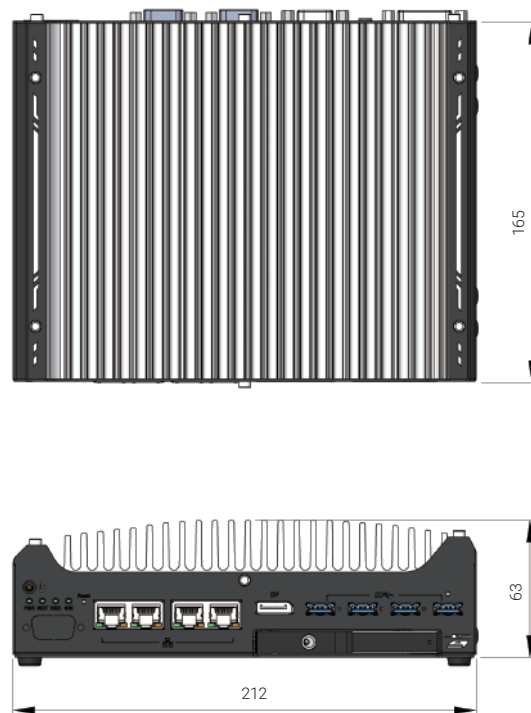

Unit : mm

## Ordering Information

Model No.	Product Description
<b>Nuvo-9531</b>	Intel® 14th/13th/12th-Gen Core™ i9/ i7/ i5/ i3 compact fanless computer with 4x 2.5GbE , 4x USB3.2 Gen 1 and a hot-swappable HDD tray
	<i>Optional 802.3at PoE+ PSE for 4x 2.5GbE ports</i>
	<i>Optional ignition power control</i>

## Optional Accessories

<b>PA-160W-OW</b>	160W AC-DC power adapter 20V/8A; 18AWG/120cm; cord end terminals for terminal block, operating temperature: -30°C to 70°C.
<b>PA-280W-ET2</b>	280W AC/DC power adapter 24V/ 11.67A ; 16AWG/ 100cm ; cord end terminals for terminal block, operating temperature : -30°C to 60°C. (recommended for 65W CPU)
<b>DINRAIL-31</b>	DIN-rail mounting assembly for Nuvo-9531 series
<b>AccsyBx-FAN-Nuvo9531_9501</b>	Fan kit with 92mm x 92mm fan for Nuvo-9531/ Nuvo-9501 series