


# SEMIL-2200GC Series

2U 19" rack mount IP69K mission-critical GPU computer including NVIDIA® L4, supporting Intel® 14th/ 13th/ 12th-Gen Core™ processor

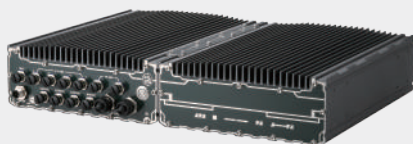

## Key Features

- 2U IP69K mission critical GPU computer with NVIDIA® L4 GPU
- Up to 128 GB ECC/ non-ECC DDR5 4800 SDRAM
- -40°C to 70°C wide-temperature fanless operation
- 2x 10GbE, 4x 2.5GbE, 1x GbE via M12 X-coded connectors
- 2x SocketCAN and 2x USB3.2 Gen1 Type-C w/ DP alternative mode
- 9V to 36V wide-range DC input with built-in ignition power control
- MIL-STD-810H, MIL-STD-461G, MIL-STD-1275D compliant

[CONTACT US](#)
[GET QUOTE](#)


\*R.O.C Patent No. I697759  
\*CN Patent Pending

## Introduction

SEMIL-2200GC is a cutting-edge, AI-enabled mission-critical computer engineered for demanding environments. Housed in a 2U 19-inch rack-mount chassis, this IP69K-rated system is impervious to dust, water, and capable of flawless operations in -40°C to 70°C environments. The SEMIL-2200GC can sustain GPU performance up to its 58°C throttling point. At its core lies an NVIDIA® L4 GPU, and coupled with Intel's 14th, 13th, or 12th generation processors to offer exceptional computing power and efficiency.


The SEMIL-2200GC employs a corrosion-resistant stainless steel and aluminum chassis to safeguard against moisture and salinity. Its ruggedized M12 connectors can withstand shock and vibration, making it ideal for harsh industrial and field applications. Its comprehensive connectivity options include dual CAN bus 2.0, multiple USB 3.2, and seven Ethernet ports including two 10GbE to connected high-speed devices.

The SEMIL-2200GC is MIL-STD-810H compliant, proven to withstand extreme temperatures, humidity, vibration, and shock. Additionally, it complies with MIL-STD-461G standards, ensuring immunity to electromagnetic interference. For applications in mobile or vehicular environments, this platform meets the requirements of MIL-STD-1275D. With its exceptional performance, rugged construction, and adherence to stringent military standards, the SEMIL-2200GC is the ideal solution for critical applications demanding reliability, durability, and advanced AI capabilities.

## Specifications


System Core		Storage Interface	
Processor	Supporting Intel® 14th-Gen Core™ CPU (LGA1700 socket, 35W TDP) - Intel® Core™ i9-14900T - Intel® Core™ i7-14700T - Intel® Core™ i5-14500T - Intel® Core™ i3-14100T	SATA HDD	2x Internal SATA port for 2.5" HDD/ SSD installation, supporting RAID 0/ 1
	Supporting Intel® 13th-Gen Core™ CPU (LGA1700 socket, 35W TDP) - Intel® Core™ i9-13900TE - Intel® Core™ i7-13700TE - Intel® Core™ i5-13500TE - Intel® Core™ i3-13100TE	M.2	1x M.2 2280 M key NVMe socket (PCIe Gen4x4) for NVMe SSD
	Supporting Intel® 12th-Gen Core™ CPU (LGA1700 socket, 35W TDP) - Intel® Core™ i9-12900TE - Intel® Core™ i7-12700TE - Intel® Core™ i5-12500TE - Intel® Core™ i3-12100TE	Expansion Bus	
		Mini PCI-E	3x full-size mini PCI Express socket with SIM slot
Chipset	Intel® R680E platform controller hub	M.2	1x M.2 2242/3052 B key socket with dual SIM slot for M.2 5G/ 4G module 1x M.2 2230 E key socket for Wi-Fi
Graphics	Integrated Intel® UHD Graphics 770 (32EU)	Power Supply	
Acceleration GPU	NVIDIA® L4 GPU	DC Input	9V to 36V DC input with reverse polarity protection (M12 L-coded)
Memory	Up to 128 GB ECC/ non-ECC DDR5 4800 SDRAM (two SODIMM slots)	Ignition Control	Built-in ignition power control (IGN/ GND signal via M12 L-coded connector)
AMT	Supports Intel vPro/ AMT 16.0	Mechanical	
TPM	Supports dTPM 2.0	Dimension	440mm (W) x 310mm (D) x 90.5mm (H) (excl. rack-mount bracket)
I/O Interface		Weight	12.2 kg
Ethernet Port	2x 10GbE Ethernet by X550-AT2 (with WoL) (M12 X-coded) 4x 2.5GbE Ethernet by Intel I226-IT (M12 X-coded) 1x GbE Ethernet by Intel I219-LM (with WoL) (M12 X-coded)	Mounting	Rack-mounting (standard) and wall-mounting (standard)
CAN Bus	2x isolated CAN 2.0 port, supporting SocketCAN in Linux	Environmental	
USB	2x Type-C USB 3.2 Gen1x1 (5Gbps) ports (shared DisplayPort) 2x USB 2.0 ports (M12 A-coded)	Operating Temperature	-40°C to 70°C
Video Port	2x Type-C USB connector supporting DP output (shared USB3.2 Gen1x1)	Storage Temperature	-40°C ~85°C
Serial Port	2x isolated 3-wire RS-232 ports (COM1/ COM2) 1x isolated 3-wire RS232 (COM3) & 1x RS-422/ 485 port (COM4)	Humidity	10%~90% , non-condensing
		Vibration	MIL-STD-810H: 514.8C-VII. Category 4
		Shock	MIL-STD-810H: 516.8 Procedure I
		EMC	MIL-STD-461G: - CE102 (10kHz~10MHz) - RE102 (2MHz~18GHz) - RS103 (2MHz~18GHz, 50V/m)
		Electrical Systems	MIL-STD-1275D: Normal operating mode (ripples, surges, spikes)
		IP Rating	IP69K

Appearance

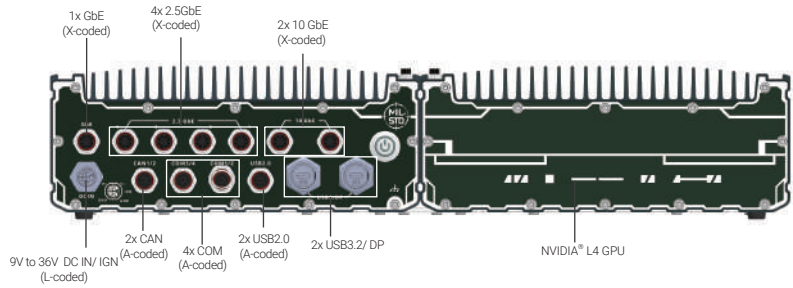

Dimensions

Unit : mm

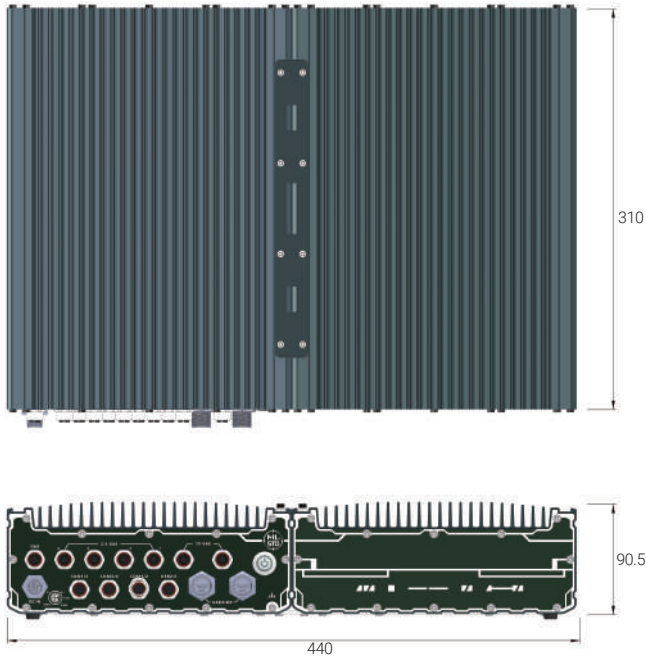

Mounting Configuration



▲ SEMIL 19" rack-mount



▲ SEMIL wall-mount






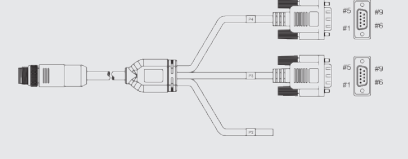
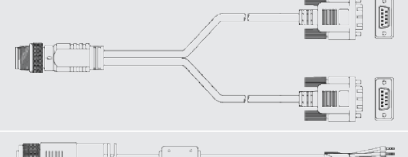

Ordering Information

Model No.	Product Description
SEMIL-2247GC	2U 19" rack mount IP69K mission critical GPU computer including NVIDIA® L4, supporting Intel® 14th/ 13th/ 12th-Gen Core™ processor with 2x M12 10GbE and 4x M12 2.5GbE ports

Optional Accessories

PA-280W-CW6P-2P	280W AC-DC power adapter 24V 11.67A, 85~264VAC, -30~+70°C w/ Wafer FML6P to 2P End Terminal cable for AWP/SEMIL
-----------------	---

# SEMIL-2000 Series

Type	Model Name	Description
	Cbl-TpCPlug-DPM-1M	TypeC Male Plug to DP Male Cable, Length : 1M
	Cbl-TpCPlug-U3TA-50CM	TypeC Male Plug to USB3.0 Type-A FML, Length: 50CM
	Cbl-TpCPlug-UTpCF-50CM	TypeC Male Plug to USB Type-C FML Cable, Length : 50CM
	Cbl-M12X8M-RJ45-500CM	M12( 8-pole-X-coded) to RJ45, CAT6, Length : 500CM
	Cbl-M12A8M-2U2TA-180CM1	M12 (8-pole-A-coded) to 2xUSB 2.0 type A (female), Length: 180CM
	Cbl-M12A8M-2DB9M_OW2-180CM1	M12 A-Code Male 8P to x2 DB9 Male+2P, Length: 180CM
	Cbl-M12A8M-2DB9M-180CM	M12 (8-pole-A-coded male) to 2x DB9 male, Length: 180CM
	Cbl-M12L5F-CordEnd5-180CM	M12 L-Code 5P(FML) to Cord End Terminal 5P, Length: 1.8M

## Cable Kit

SEMIL-2000 M12 cable kit		
Cblkit-M12-SEMIL2007	7x Cbl-M12X8M-RJ45-500CM	1x Cbl-M12A8M-2U2TA-180CM1
	2x Cbl-M12A8M-2DB9M_OW2-180CM1 (COM1/2 & CAN1/2)	1x Cbl-M12A8M-2DB9M-180CM (COM3/4)
	1x Cbl-M12L5F-CordEnd5-180CM	